


ZM12-B

Industry / Craft

Z-LASER

Brand new product for a variety of applications

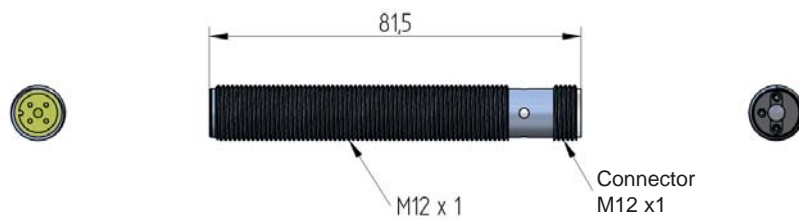


Features

- 5-30VDC operation with reverse polarity protection
- Power up to 40mW, available in 635nm-808nm
- Red and infrared laser in a compact housing
- Simple, external tool focusing mechanism
- Quick installation by M12 thread for Sensor mounting or **Z-LASER** standard mounting H8-M12
- Wide range of diodes and optics
- Potential-free housing for trouble-free installation

Applications


- Positioning
- Machine Vision
- Wood processing
- Metal processing
- Textile industry
- Stone processing
- Food industry
- Medical science
- Automotive industry




1: voltage supply +
2: -
3: voltage supply -
4: -

Optics

Line



Dot



Mounting and power supply

H8-M12



WNG-9E-24M



Specifications

Optical

Optical power stability	3% over operating temperature range
Wavelength vs. temperature	Typ. 0,20 - 0,30nm / °C depending on wavelength
Range of focus	100mm up to ∞
Divergence of beam (FWHM)	< 1mrad (with dot optic)
Pointing stability	< 15μrad / °C

Optics

Line (Gaussian profile)	60°, 90°, symmetrical or asymmetrical
Point	elliptical or circular

Standard wavelengths and power (other on request)

635nm, 640nm, 643nm, 808nm	up to 40mW depending on wavelengths
----------------------------	-------------------------------------

Electrical

Supply voltage	5-30VDC
Mode of operation	APC with current limiting, or CC
Modulation	continous wave
Protection	reverse polarity and transient/ESD
Connection	M12 plug, 4-pin


Mechanical

Dimensions	81.5mm x Ø 12mm
Housing	Laser: M12 industry housing, chromed brass
Protection category	IP 54
Weight	ca. 40g
Electrical isolation	potential-free housing

Environmental conditions

Case temperature	-10°C up to +50°C (heat dissipation e.g. with mounting H8-M12)
Storage temperature	-10°C up to +80°C
Humidity	Max. 90%, non condensing
MTTF at 25°C	> 100.000h (808nm), 30.000h (635nm - 643nm)

Order code:

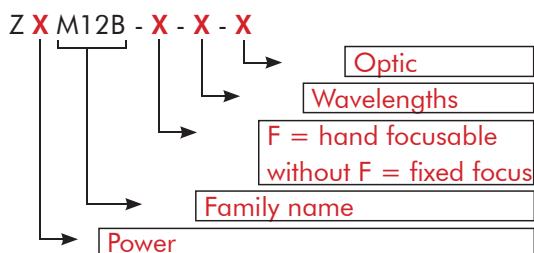

© Z-LASER / Subject to change

Z-LASER Optoelektronik GmbH • Merzhauser Str. 134 • 79100 Freiburg • Germany
 Tel.: +49/761/296 44 44 • Fax: +49/761/296 44 55 • info@z-laser.de • www.z-laser.com